

—
your partner
in sensor
technology.

+ Datasheet EE451

Wall-mounted Temperature Sensor
for Indoor and Outdoor



EE451

Wall-mounted Temperature Sensor for Indoor and Outdoor

The EE451 wall-mounted sensor reliably measures the temperature (T) indoors and outdoors in building automation, HVAC and process control.

Analogue, Digital and Passive Outputs

The measured data is available at the voltage or current output, as well as on the RS485 interface with Modbus RTU or BACnet MS/TP protocol. Additionally, EE451 features a wide choice of sensing elements for passive temperature measurement. An optional display is available for the EE451 with analog output.

Easy Installation

The compact and robust design allows easy and quick installation as well as unbiased measurement of the ambient temperature.

Configurable and Adjustable

An optional adapter and the free Product Configuration Software facilitate the setup and adjustment of the EE451.



EE451 with active output



EE451 with passive output



EE451 with active output and display

Features

LC display

- 38 x 20 mm (1.5 x 0.8")

External mounting holes

- Mounting with closed cover
- Protection against construction site pollution
- Easy and fast mounting




Bayonet screws

- Open/close with a ¼ rotation

Enclosure

- Protection rating: IP65/Nema 4X
- Polycarbonate (PC)

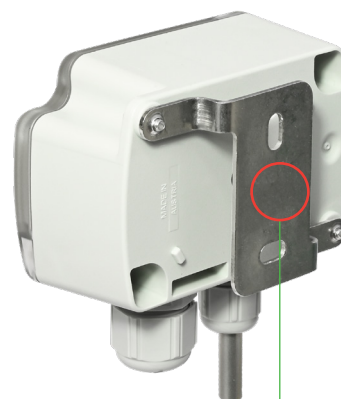

Mounting bracket

- Distance to wall for correct measurement of ambient temperature

Test report


According to DIN EN 10204-2.2

Dimensions

Values in mm (inch)

Passive Output


Mounting bracket included in the scope of supply

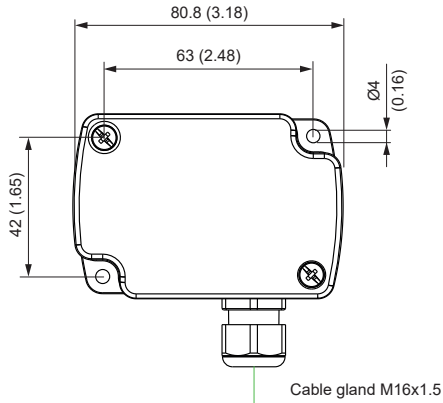

Cable gland M16x1.5

Active Output


Mounting bracket included in the scope of supply

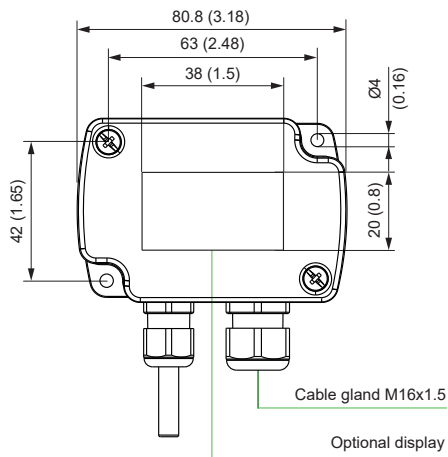

Cable gland M16x1.5


Optional display

Mounting

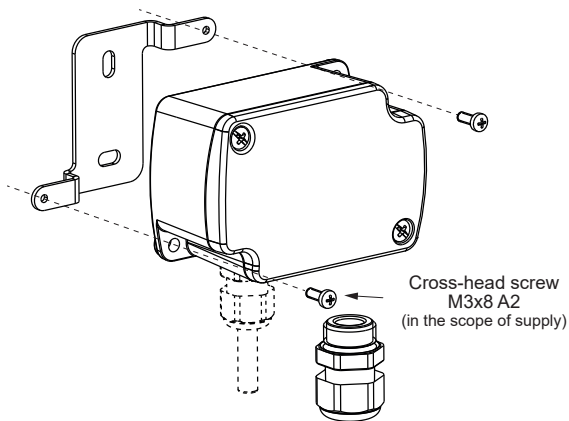

Cross-head screw
M3x8 A2
(in the scope of supply)

Mounting Bracket

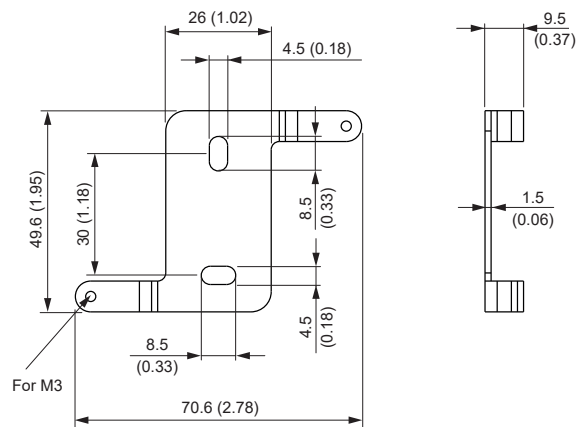

For M3

Technical Data

Measurands

Temperature (T) - Active

Measuring range	-40 °C...+70 °C (-40...+158 °F)
Accuracy @ 20 °C (68 °F)	±0.3 °C (±0.54 °F)

Temperature (T) - Passive

Measuring range	-40 °C...+70 °C (-40...+158 °F)		
Sensor type	Nominal resistance	Sensitivity	Standard
Pt100 DIN B	R ₀ : 100 Ω	TC: 3.850 x 10 ⁻³ /°C	DIN EN 60751
Pt1000 DIN B	R ₀ : 1000 Ω	TC: 3.850 x 10 ⁻³ /°C	DIN EN 60751
NTC10k B3950	R ₂₅ : 10 kΩ ±0.5 %	B _{25/85} : 3989 K (B _{25/50} : 3950 K ± 1.0 %)	-
NTC20k B4286	R ₂₅ : 20 kΩ ± 0.2 °C	B _{25/85} : 4286 K (B _{25/85} : 4286 K ± 1.0 %)	-
Ni1000 TK6180 DIN B	R ₀ : 1000 Ω	TC: 6 180 ppm/K	DIN 43760
Ni1000 TK5000 DIN B	R ₀ : 1000 Ω	TC: 5 000 ppm/K	DIN 43760

Outputs

Analogue

Analogue output	0 - 10 V 4 - 20 mA (2-wire)	-1mA < I _L < 1 mA R _L ≤ 500 Ω	I _L = load current R _L = load resistance
-----------------	--------------------------------	--	---

Digital




Digital interface	RS485 (EE451 = 1 unit load)
Protocol Factory settings Supported Baud rates Measured data types	Modbus RTU Baud rate see order information, 8 data bits, parity even, 1 stop bit, Modbus address 66 9600, 19200 and 38400 FLOAT32 and INT16
Protocol Factory settings Supported Baud rates	BACnet MS/TP Baud rate see order information, 8 data bits, parity none, 1 stop bit, BACnet address 66 9600, 19200, 38400, 57600, 76800 and 115200

T Sensor Passive

Sensor connection	2-wire connection
Measuring current, typ.	<1 mA (according to technical data of the specific T sensing element)

Technical Data

General

Power supply class III  USA & Canada: Class 2 supply necessary, max. voltage 30 V DC 0 - 10 V, RS485 4 - 20 mA		15 - 35 V DC or 24 V AC ±20 % 10 V DC + R _L x 20 mA < V+ < 35 V DC R _L = load resistance	
Current consumption @ 24 V	Voltage output	DC supply max. 0.8 mA AC supply max. 4.6 mA _{rms}	With display max. 1.7 mA With display max. 7 mA _{rms}
	Current output	According to output current	According to output current
	Digital interface	DC supply typ. 3.5 mA AC supply typ. 12 mA _{rms}	
Electrical connection		Screw terminals, max. 2.5 mm ² (AWG14)	
Cable glands		M16x1.5/UL94 V-2	
LC-display		Available for output A3 and A6 1 line, unit according selected measurand Without backlight Visible area 38 mm x 20 mm (1.5" x 0.8")	
Humidity working range		5...95 %RH, non-condensing	
Temperature working range		Without display With display	-40...+70 °C (-40...+158 °F) -20...+50 °C (-4...+122 °F)
Storage conditions		Without display With display	-30...+70 °C (-22...+158 °F) 5...95 %RH, non-condensing -20...+50 °C (-4...+122 °F) 5...95 %RH, non-condensing
Mounting bracket material		Stainless steel (1.4301 / 304)	
Enclosure	Material Protection rating	Polycarbonate (PC), UL94 V-0 approved IP65/NEMA 4X	
Electromagnetic compatibility		EN 61326-1 FCC Part15 Class B	EN 61326-2-3 ICES-003 Class B Industrial environment
Conformity		 	
Configuration and adjustment		Analogue Digital	PCS10 Product Configuration Software (free download: www.epluse.com/pcs10) and configuration adapter. EE-PCS Product Configuration Software (free download: www.epluse.com/configurator) and configuration adapter.

Ordering Guide

Feature	Description	Code			
Hardware Configuration		EE451-			
	Model	Active	M3		
		Passive	M7		
	Output	0 - 10 V	A3		
		4 - 20 mA	A6		
		RS485		J3	
	T sensor passive ¹⁾ (R-T-characteristics see www.epluse.com/ee451)	Pt100 DIN B			TP2
		Pt1000 DIN B			TP4
		NTC 20k, B4286			TP6
		Ni1000, TK6180 DIN B			TP9
NTC 10k, B3950				TP11	
	Ni1000, TK5000 DIN B			TP19	
Display	Without display	No code			
	Display	D1			
Software Setup - Outputs	Output (T) measurand	Temperature [°C]	No code		
		Temperature [°F]	MA2		
	Output (T) scaling low	0	No code		
		Value (within the working range)	SALValue		
	Output (T) scaling high	50	No code		
		Value (within the working range)	SAHValue		
	Protocol	Modbus RTU ²⁾		P1	
		BACnet MS/TP ³⁾		P3	
	Baud rate	9 600		BD5	
		19 200		BD6	
38 400			BD7		
57 600 (for BACnet only)			BD8		
76 800 (for BACnet only)			BD9		
	115 200 (for BACnet only)		BD10		

1) Other passive sensor types are available on request for a minimum order quantity of 500 pcs.

2) Factory settings: Parity even, stop bit 1. Modbus Map and communication setting: see User Guide and Modbus Application Note at www.epluse.com/ee451.

3) Product Implementation Conformance Statement (PICS) available at www.epluse.com/ee451.

Order Examples

EE451-M3J3P3BD7

Feature	Code	Description
Model	M3	Active
Output	J3	RS485
Protocol	P3	BACnet MS/TP
Baud rate	BD7	38400

EE451-M3A3D1

Feature	Code	Description
Model	M3	Active
Output	A3	0 - 10 V
Display	D1	Display
Output (T) measurand	No code	Temperature [°C]
Output (T) scaling low	No code	0
Output (T) scaling high	No code	50


EE451-M7TP11

Feature	Code	Description
Model	M7	Passive
T sensor passive	TP11	NTC 10k, B3950

Accessories

For further information see datasheet [Accessories](#).

Description	Code
USB configuration adapter for EE451 with analogue output	HA011023
USB configuration adapter for digital interface	HA011066
E+E Product Configuration Software for digital output (Free download: www.epluse.com/configurator)	EE-PCS
E+E Product Configuration Software for analogue output (Free download: www.epluse.com/pcs10)	PCS10
Power supply adapter	V03
Conduit Adapter, M16x1.5 auf 1/2"	HA011110

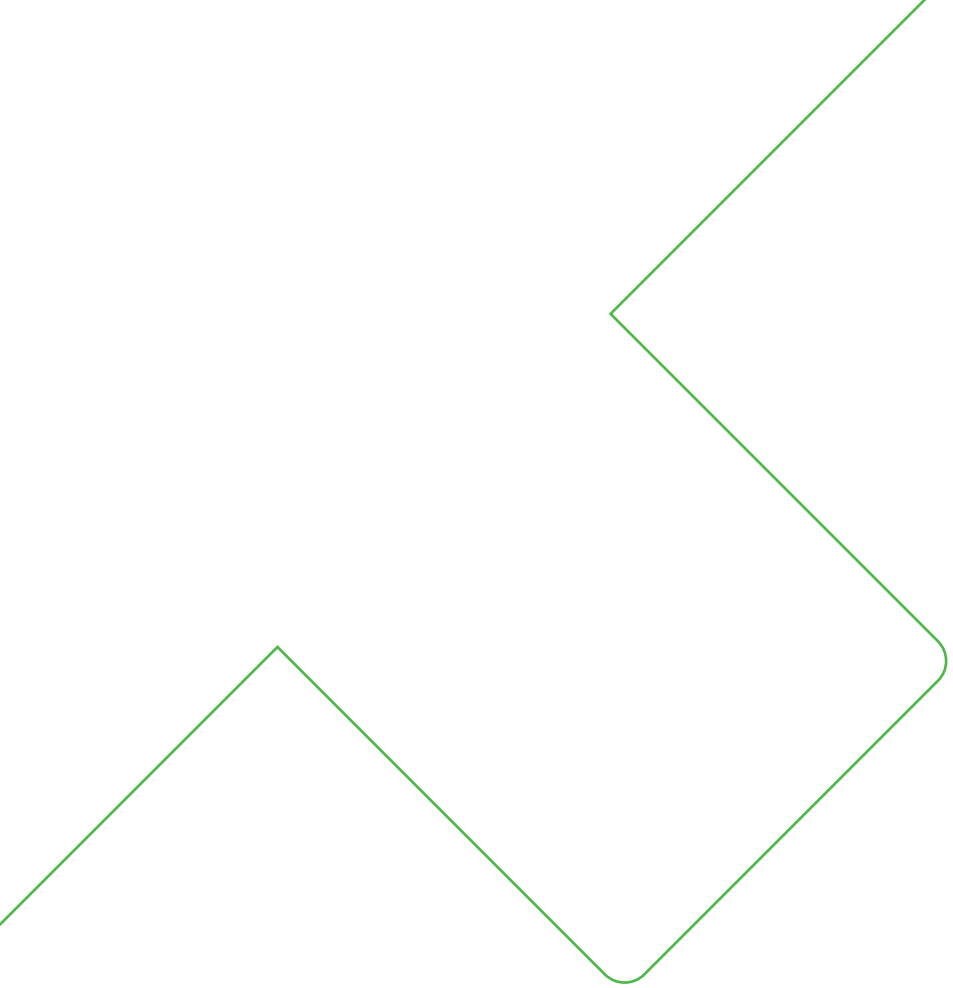

Company Headquarters &
Production Site

E+E Elektronik Ges.m.b.H.
Langwiesen 7
4209 Engerwitzdorf | Austria
T +43 7235 605-0
F +43 7235 605-8
info@epluse.com
www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd.
T +86 21 6117 6129
info@epluse.cn

E+E Elektronik France SARL
T +33 4 74 72 35 82
info.fr@epluse.com

E+E Elektronik Deutschland GmbH
T +49 6171 69411-0
info.de@epluse.com

E+E Elektronik India Private Limited
T +91 990 440 5400
info.in@epluse.com

E+E Elektronik Italia S.R.L.
T +39 02 2707 86 36
info.it@epluse.com

E+E Elektronik Korea Ltd.
T +82 31 732 6050
info.kr@epluse.com

E+E Elektronik Corporation
T +1 847 490 0520
info.us@epluse.com

Version v1.9 | 11-2023
Modification rights reserved



—
your partner
in sensor
technology.

www.epluse.com